

VLITEX
A A 95

JUST HANG IT – FORGET ABOUT GLUING!

For uniform, smooth, textile-like walls.

VLITEX AA95. The first
self-adhesive pre-coated
Glass-yarn Non-Woven

**DIRECT
EASY
FUNCTIONAL**

Style your walls and ceilings
QUICKLY AND NICELY with the new
self-adhesive VLITEX AA95.
Simplify the hanging process –
from the roll directly on the wall!

VLITEX AA95

Uncompromisingly **SIMPLE & FAST**

Never has wallcovering hanging been so easy and fast thanks to the efficient self-adhesive technology from **VLITEX AA95**. The glue is already integrated on the back side of this hybrid non-woven in the production. No need to apply wallcovering adhesive on the wall and also no need to moisten the backside to activate the glue.

With **VLITEX AA95**, you simply unpack and start hanging. **Important:** smooth out properly with a **hard spatula** or roller with enough pressure over the whole area. **VLITEX AA95** can be painted over directly with all painting techniques. Painting over the properly fixed **VLITEX AA95** creates the homogeneous strong link to the wall and ceiling. For **first coat** we strongly recommend **VLITEX AA-Haftgrund** undiluted or comparable quality paints/primers, imperatively matt, lightly diluted with 10 to 15% clean water, so to make sure paint can penetrate through the Vlies homogeneously.

VLITEX AA95 is absolutely healthy –
contains no PVC, plasticizers or solvents.
Permeable and humidity regulating.
Flame retardant class B1, according to DIN 4102-1



Crack Bridging

Smaller cracks and damage of the wall will be durably and effectively concealed with **VLITEX AA95**. For extremely smooth and beautiful walls.



Strong and resistant

VLITEX AA95 is easy to clean and absolutely tear and abrasion resistant in combination with a high-quality dispersion/ Latex paint according to ELF – DIN 18363. Thanks to this, **VLITEX AA95** is very durable.



Pre-coated

VLITEX AA95 can be painted directly with finishing paint. For **first coat** we strongly recommend **VLITEX AA-Haftgrund**.


VLITEX

A A 95

Easy to hang – **without gluing!**




HANGING CAN BE SO SIMPLE!



1. Unpack

Please take the **VLITEX AA95** roll out from the cardboard, remove the foil package.

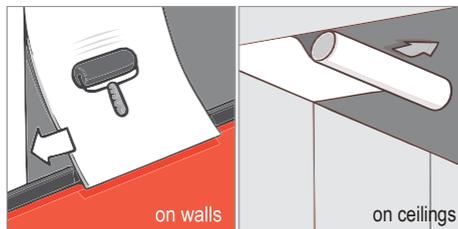

2. Hang it

Cut your **VLITEX AA95** roll to the desired length. While hanging **VLITEX AA95**, make sure to align the lengths, or make an even easier application with a double cut. Fix **VLITEX AA95** on the wall.
Important: smooth out properly with a hard spatula or roller with enough pressure over the whole area.



3. Paint it

VLITEX AA95 shall be painted immediately with all painting techniques, all paint shades. For **first coat** we strongly recommend **VLITEX AA-Haftgrund** or comparable quality paint/primer.

TECHNICAL INFORMATION:

Precoated, self-adhesive glass hybrid fleece for fine, subtle textile like surfaces. Dimensionally stable, can be painted over with common painting techniques for indoor use. Can be recoated with ELF internal dispersion paint according to DIN EN 13300. Without adhesive or water activatable glue thanks to the back-sided self-adhesive glue. For first coat we strongly recommend VLITEX AA-Haftgrund undiluted or comparable quality paints/primers **VLITEX AA95** allows the paint penetrating through itself and thus building up a strong homogenous fixation to the wall and ceiling. The surfaces to be treated should be smooth, solid, clean and dry. Do not cover wall surfaces that have less than + 10 °C, only apply at room temperature. Gypsum board, for higher requirements Q3 or the highest requirement Q4 recommended. Substrate preparation and priming etc. according to VOB part C, DIN 18363, para. 3. **Consumption:** approx. 1.03 m², considerably more for double cut. For pure reinforcement, embedding and spreading procedure calculate approx. 10 cm overlap. **Weight:** 95 g/m² +/- 5 %.

CONTACT:

Schwender GmbH
Rehleite 2
95445 Bayreuth, Germany
info@vlitex.com
www.schwender-gmbh.com